

## Redashe Trigger Operated Water Guns

FOR USE WITH A WIDE SELECTION OF REDASHE HOSE REELS

Redashe trigger operated water guns give fingertip control of water usage in a variety of wash down applications. Medium duty, heavy duty and stainless steel versions are available.

**FEATURES:**

- Easy to use trigger operation
- Adjustable spray/jet pattern
- Water temperatures up to 95° Celsius
- Flow rates up to 60 ltrs a minute
- Automatic water shut-off on release of trigger
- Water pressures up to 25bar / 367psi
- All supplies with safety trigger guard (excludes the XGM)




Part Number	Description	Thread	Material
<b>Water Gun Adaptors</b>			
AGN1A	1/2" Male Taper x 1/2" Tail Piece	BSP	Brass
AGN1ASS	1/2" Male Taper x 1/2" Tail Piece	BSP	Stainless Steel
AGN2A	1/2" Male Taper x 3/4" Tail Piece	BSP	Brass
AGN2ASS	1/2" Male Taper x 3/4" Tail Piece	BSP	Stainless Steel
AGM1A	3/4" Male Taper x 1/2" Tail Piece	BSP	Brass
AGM2A	3/4" Male Taper x 3/4" Tail Piece	BSP	Brass
AGN4SWT	1/2" Male Taper x 1/2" Swivel Tail Piece	BSP	Brass
AGN4SWTSS	1/2" Male Taper x 1/2" Swivel Tail Piece	BSP	Stainless Steel



XGM

AGN4SWT

AGN4SWTSS

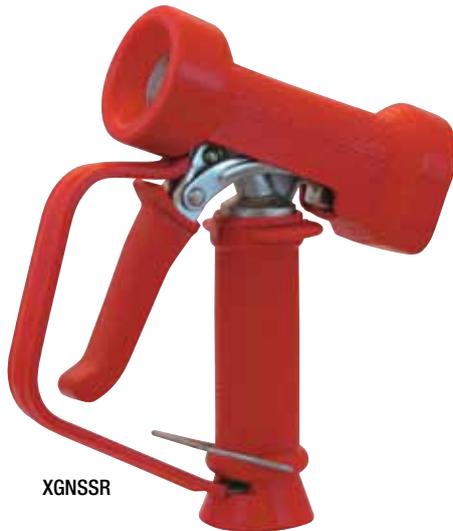

XGNSSR



Part Number	Description	Temp	Pressure psi/bar	Flow Rate
<b>GM Medium Duty Water Guns</b>				
XGM	3/4" BSP female inlet	60°C	150 psi / 10 bar	15 ltr/min
XGM1	c/w 1/2" brass tailpiece	60°C	150 psi / 10 bar	15 ltr/min
XGM2	c/w 3/4" brass tailpiece	60°C	150 psi / 10 bar	15 ltr/min
<b>GN Heavy Duty Water Guns</b>				
CGN	1/2" BSP female inlet	95°C	367 psi / 25 bar	75 ltr/min
CGN1	c/w 1/2" brass tailpiece	95°C	367 psi / 25 bar	75 ltr/min
CGN2	c/w 3/4" brass tailpiece	95°C	367 psi / 25 bar	75 ltr/min
<b>GNSS Stainless Steel Water Guns (White)</b>				
XGNSS	1/2" BSP female inlet	95°C	367 psi / 25 bar	75 ltr/min
XGNSS1	c/w 1/2" SS tailpiece	95°C	367 psi / 25 bar	75 ltr/min
XGNSS2	c/w 3/4" SS tailpiece	95°C	367 psi / 25 bar	75 ltr/min
<b>GNSS Stainless Steel Water Guns (Red)</b>				
XGNSSR	1/2" BSP female inlet	95°C	367 psi / 25 bar	75 ltr/min
XGNSSR1	c/w 1/2" SS tailpiece	95°C	367 psi / 25 bar	75 ltr/min
XGNSSR2	c/w 3/4" SS tailpiece	95°C	367 psi / 25 bar	75 ltr/min



XGNSS